


**POWDER
COATED
PRIMER**



U740D / U750D Hoist

Experience that Matters

Champion Hoist and Equipment™ has a low tolerance for defects and a strong desire for quality craftsmanship to ensure customer satisfaction. Dedicated to perfection and continuing to lead the industry with over 35 years of excellence, Champion built hoists are well developed and industry proven. Champion built equipment is shot blasted and powder coated black to ensure a long lasting durable product. We are a proud member of the National Truck Equipment Association.

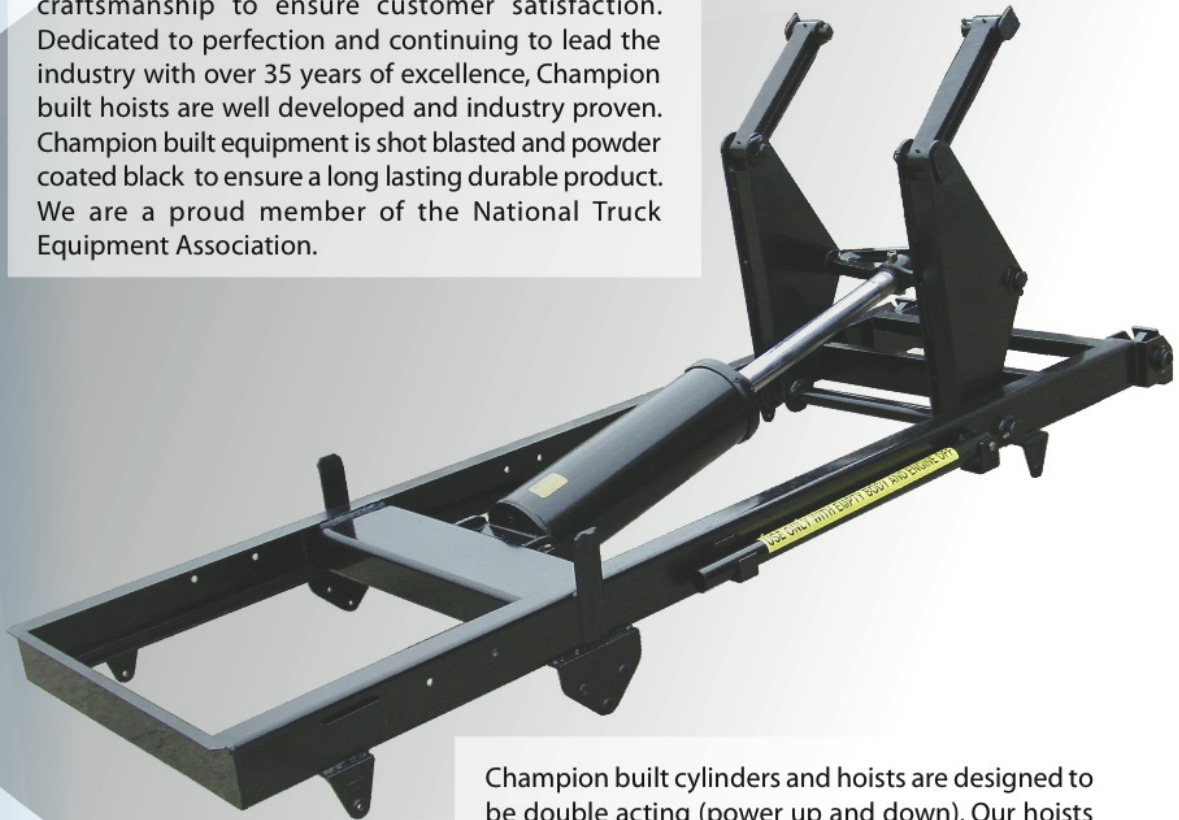

Champion built cylinders and hoists are designed to be double acting (power up and down). Our hoists are easy to install with as little truck and body modification as possible. To further ease the installation process, Champion hoists mount to the body and truck chassis using heavy duty grade 8 bolts with little or no welding needed.

With over 30 hoists offered, Champion Hoist and Equipment™ is sure to have what you need.

Visit Champion Hoist and Equipment™ and all affiliated companies on the world wide web.
www.championtruckhoist.com

U740D / U750D Hoist

Application Specifications

This hoist is perfect for 9' to 10' bodies and has a dumping angle of 50 degrees. The 740U/750U hoist is designed for trucks with 72" - 84" CA. For the most durable combination, 6" body longitudinals are recommended. The 740U/750U hoist is equipped with one 7" cylinder with a 20" stroke and 2500 psi. 2 1/2" chrome shaft. The 740U hoist is changed to a 750U with an increase in pressure from 1800 psi to 2300 psi. All Champion manufactured hoist are Powder Coated Tough™ and are rigorously inspected by quality control to ensure top quality




Shown is the 740U/750U heavy duty cast lift arms. These arms easily attach directly to the body using 4140 grade, 1 1/2" pivot pins. The arms have easily accessible zerk grease fittings.

This Subframe is built with A572 grade 50 high tensile steel & 4140 grade weldable castings

740U is equivalent to class 40
750U is equivalent to class 50



This hoist is easily installed on the trucks chassis using extra heavy duty 4140 grade cast mounting brackets, with 12 grade 8 bolts and minimal welding. Installation is quick and easy.

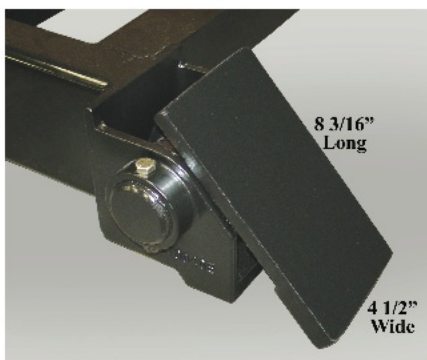

The 740U/750U's hinges are cast from extra heavy duty 4140 grade steel to ensure durability. Adding to the ease of installation and durability, these hinges are welded directly to the body's longitudinals.

Available Components

The G102D pump/valve combination direct mount gear pump does not require a drive line thus making it safer and more dependable. This pump has an S.A.E. "B" 2-bolt flange. 15 GPM @1200 RPM



The P22 direct gear pump is bi-rotational with side and rear ports for versatility, thus eliminating the drive line for added safety and dependability. This pump has an S.A.E. "B" 2-bolt flange. 15 GPM @1200 RPM



The SP4 valve with cable and lever control is used in conjunction with the P22 pump. This valve is easy to install and makes the hydraulic system double acting.



The 8.5 gallon box type reservoir is designed to be frame mounted inboard. It hangs out of the way and is equipped with a brass wire mesh suction strainer, oil level & temperature gauge.



Champion Hoist and Equipment™
200 Champion Drive
Dunn, NC 28334
(910) 897-4995 Fax (910) 897-7306